

(19) World Intellectual Property Organization  
International Bureau




(43) International Publication Date  
25 January 2001 (25.01.2001)

PCT

(10) International Publication Number  
**WO 01/06759 A1**

- (51) International Patent Classification<sup>7</sup>: H04N 5/00, G06F 13/00
- (21) International Application Number: PCT/US00/17040
- (22) International Filing Date: 21 June 2000 (21.06.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
60/144,155 15 July 1999 (15.07.1999) US
- (71) Applicant (for all designated States except US): THOMSON LICENSING S.A. [FR/FR]; 46, quai Alphonse le Gallo, F-92648 Boulogne Cedex (FR).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): WHITE, David, Glen [US/US]; 2215 East 67th Street, Indianapolis, IN 46220 (US). STEWART, John, Sidney [US/US]; 3655 West 71st Street, Indianapolis, IN 46268 (US).
- (74) Agents: TRIPOLI, Joseph, S. et al.; Thomson Multimedia Licensing Inc., P.O. Box 5312, Princeton, NJ 08540 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— With international search report.
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: DEMODULATION SECTION IN A MULTIPLE PROTOCOL RECEIVER

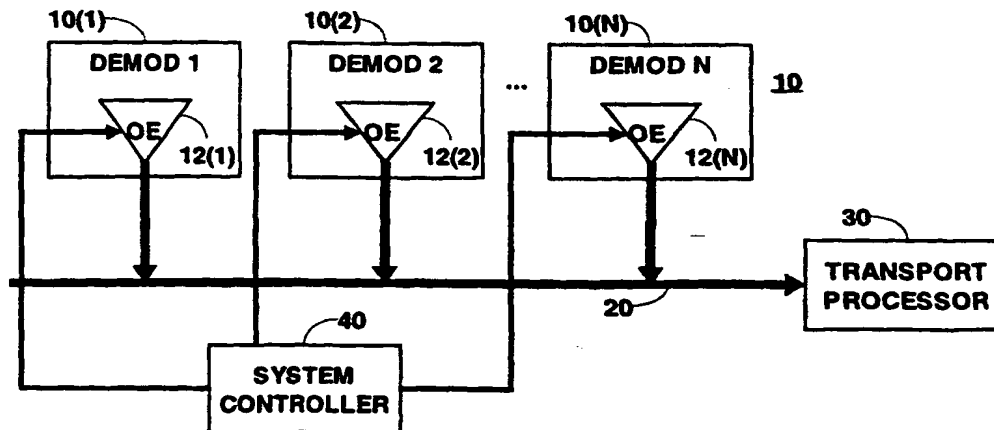

(57) Abstract: A multiple protocol receiver includes a demodulator section. The demodulator section includes a plurality of demodulators, each demodulator having a tri-state output terminal for generating demodulated digital data. The tri-state output terminals are coupled to a signal bus. The signal bus, in turn, is coupled to a signal processor, such as a transport processor, for processing the demodulated digital data.